

Hand Lamp Series 6140



www.stahl.de



- > Unique mechanism for switching on
- > Ergonomically formed handlamp
- > Extremely high luminous intensity



11628E00

E2

	ATEX					
Zone	0	1	2	20	21	22
For use in	x	x	x	x	x	x

Selection Table

Version	Rated data	for batteries pieces	Order number	Weight kg
Hand lamp Series 6140	4.5 V / 0.3 A	3	6140/2-1	0.550

Hand lamps are supplied with batteries

Explosion Protection

Europe (ATEX)	
Gas and dust	
Gas explosion protection	ZELM 07 ATEX 0325 X
Gas explosion protection	⊕ II 1 G Ex ia op is IIC T4
Dust explosion protection	⊕ II 1 D iaD 20 T130 °C

Certifications and certificates

Certificates	ATEX, Kazakhstan (GOST K), Russia (GOST R), Serbia (SRPS), Belarus (operating authorisation)
--------------	--

WebCode 6140A

Hand Lamp

Series 6140

Technical Data

Luminous characteristics

Lamps	1 High power LED (3 Watt)
Service life time	> 48 hours (continuous operation)

Ambient conditions

Ambient temperature	-20 ... +50 °C
---------------------	----------------





Mechanical data

Type of protection	IP65
Material	
Enclosure material	polyamide, antistatic
Lens	polycarbonate
Note	Do not open lamp in hazardous locations!


Batteries

3 x LR14 batteries
For other battery types see operating instructions

Accessories and Spare Parts

Designation	Figure	Description	Art. no.	Weight kg
Batteries	 05006E00	1.5 V		
		3 pieces	167742	0.420
Leather holster	 04841E00	Holster for carrying the lamp	167740	0.160
Replacement lens	 05356E00	Lens material is polycarbonate	167739	0.003
Skid Washer	 10733E00	NBR gasket	167741	0.003

Dimensional Drawings (All Dimensions in mm) - Subject to Alterations

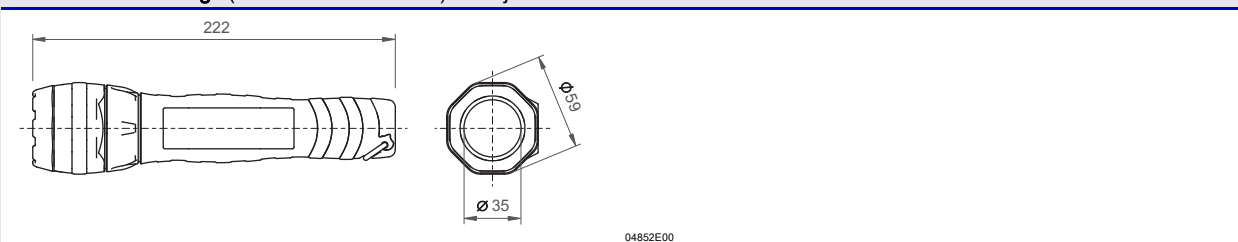

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.